


Self-supporting Round Type FTTH Drop Cable

Cable structure:

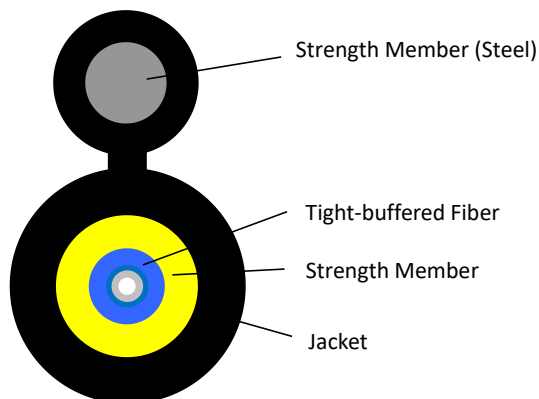

Applications:

- Used in access network or as access cable from outdoor to indoor, in customer premises network;
- Used as access building cable in premises distribution system, especially used in indoor or outdoor aerial access cabling.

Features:

- Good mechanical and environmental characteristics;
- Flame retardant characteristics meet the requirements of relevant standards;
- The mechanical characteristics of jacket meet the requirements of relevant standards;
- Soft, flexible, easy to lay and splice, and with big capacity data transmission;

Cable Parameters:

Fiber Count	Cable Dimension (mm)	Cable Weight (kg/km)	Tensile (N)		Crush (N/100mm)		Min. Bend Radius (mm)		Range of Temperature (°C)
			Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
1	5.5*3.0	18	300	600	200	1000	60	30	-20~+70
2	6.0*3.5	21	300	600	200	1000			

Note: 1. All the values in the table, which are for reference only, are subject to change without notice;
 2. The minimum bend radius (static) is 15mm when G.657 fiber is used.