


## FOSC-001 Horizontal Box Specification

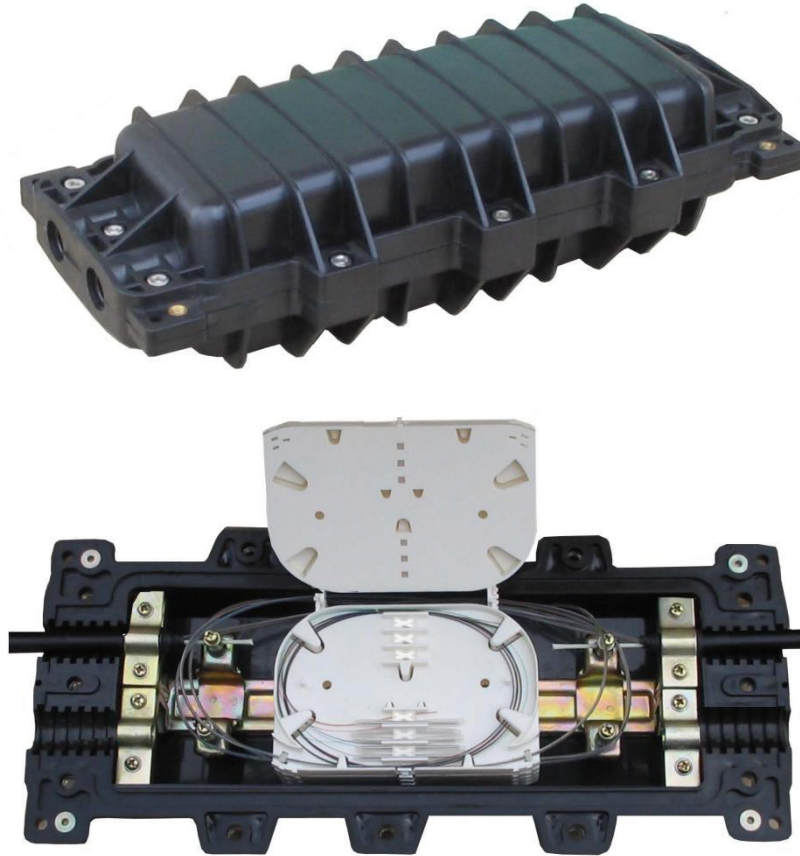

FOSC-001 provide with 4 fiber cable in-out round ports and the cable diameter is from  $\Phi 10$ - $\Phi 22$ . It can be used in aerial, duct, and direct buried application. This product is made from the high-quality and with the mechanical sealing structure filled with the sealing material. The external component and fastening piece are all made from the high-quality stainless steel. It can be opened after sealing.

### Available for duct, Aerial, Direct buried

Item	FOSC-001
Dimension (mm)	435×190×120
Weight (Kg)	2.8
Cable diameter (mm)	$\Phi 10$ - $\Phi 22$
Cable entry ports	Two cable entry port on each end
Max capacity of fiber splice	24(single)
Max Capacity of splice tray	8
Max capacity	192(single)
Sealing structure	Sticky cincture

**Kit contents**


Description	Type	Quantity
Splice protector tube		According to the fiber cores
Sticky cincture	Widen	1pcs
Sticky cincture	Narrow	2pcs
Insulated robber belt		1pcs
Cables ties		4×splice tray
Sealing washer		4sets
Block		2 ( piece)
Marking note		4×fiber cores
Hanging hook	Aerial-hanger	1pair
Allen wrench	6mm	1pcs

**Pack information**

Inner carton dimension(mm)	Inner carton weight (kg)	Outside carton dimension (mm)	Outside carton weight (kg)	No of units per carton (pcs)
496*196*138	2.8	515*425*575	23. 8	8